

Section 3 800 Line




STANDARDS







BRACKETS

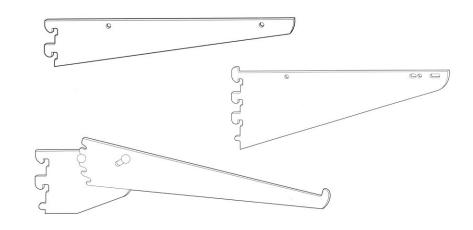

FACEOUTS








800 Standards are Slotted 1/4 at 1/4 On Center (Heavy Duty 1/8/4 thick material)

No. 800 Standard



| Part Number | Length | Packed/Ctn | Wt./Ea. |
|-------------|--------|------------|----------|
| 800-4 | 4′ | 10 | 3 Lbs. |
| 800-5 | 5′ | 10 | 3 ¾ Lbs. |
| 800-6 | 6′ | 10 | 4 ½ Lbs. |
| 800-7 | 7′ | 10 | 5 ¼ Lbs. |
| 800-8 | 8′ | 10 | 6 Lbs. |

Use #8 Screw.



Application:

Heavy duty wall standards.


Features:

1/4" thick steel. On center dimension from counter-sunk screw hole to counter-sunk screw hole is 6".


Stock Finish:

Brillatone (Satin Zinc) and Polished Chrome.

No. 803/804/805 Standard



| Part Number | Length | Packed/Ctn | Wt./Ea. |
|-------------|--------|------------|---------|
| 803-6 | 6′ | 14 | 6 Lbs. |
| 803-8 | 8′ | 14 | 8 Lbs. |
| 804-6 | 6′ | 10 | 7 Lbs. |
| 804-8 | 8′ | 10 | 9 Lbs. |
| 805-6 | 6′ | 8 | 7 Lbs. |
| 805-8 | 8′ | 8 | 9 Lbs. |




1/6" thick steel. On center dimension from counter-sunk screw hole to counter-sunk screw hole is 6" staggered side to side

Stock Finish:

Brillatone (Zinc) and P51 Black Powder Coat.

No. 885 1" Square Tube - Standard



*1"x 2" slotted tube standard also available with slotting on one or both 1" sides. Part number 880.

Application:

Heavy Duty welded frames, wall cases, and outriggers.


Features:

 $\frac{1}{2}$ " thick steel, single slotted. Available slotted on 1, 2, or 3 sides.

Stock Finish:

Made-to-Order.

No. 801 Slotted Strip



| Part Number | Length |
|-------------|---------------|
| 801-X | Made-to-order |

Application:

Loose fixtures and back islands.

Features:

Single slotted strip with or without screw holes. Made-to-order at any length up to 10'. %'' thick steel.


Stock Finish:

Made-to-Order.



No. 500 Concealed Standard/Stud

| nber | Length | Approx. Wt./Ea. |
|--------|--------------------------------------|--|
| (½") | 6′ | 1.27 Lbs./Lin. Ft. |
| (1/2") | 8′ | 1.27 Lbs./Lin. Ft. |
| (5/8") | 6′ | 1.27 Lbs./Lin. Ft. |
| (5/8") | 8′ | 1.27 Lbs./Lin. Ft. |
| (1") | 6′ | 1.27 Lbs./Lin. Ft. |
| (1") | 8′ | 1.27 Lbs./Lin. Ft. |
| | (½") (½") (½") (½") (½") | (½") 6' (½") 8' (½") 6' (½") 8' (½") 8' (1") 6' |




Application

For moderate loads. Designed for use between your studs or with #510 stud.


Features:

Available for ½", %" or 1" Wallboard. ½" thick slotted steel plate enclosed within roll formed 22-gauge galvanized steel.



| Part Number | Length | Approx. Wt./Ea. |
|-------------|-----------|--------------------|
| 510 | Specifiy" | 1.02 Lbs./Lin. Ft. |

^{*} Order to required length.

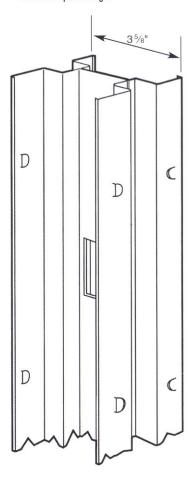

Application:

Designed to be use with #500 Standard.

Features:

Comes assembled with # 1000 25-gauge galvanized steel.



No. 841 Shelf Bracket

Application:


Perimeter and loose fixtures with glass or wood shelving. See page 3.5 for shelf rest clips.

Features:

1/8" thick tempered steel. Slim profile.

Stock Finish:

Brillatone (Satin Zinc).



| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| 841-10 | 10" | 24 | 8 Lbs. |
| 841-12 | 12" | 24 | 10 Lbs. |
| 841-14 | 14" | 24 | 14 Lbs. |
| 841-16 | 16" | 24 | 16 Lbs. |
| 841-18 | 18" | 24 | 20 Lbs. |

No. 842 Shelf Bracket

Application:

Perimeter and loose fixtures with glass or wood shelving.


See page 3.5 for shelf rest clips.

Features:

1/8" thick tempered steel. Slim profile.

Stock Finish:

Brillatone (Satin Zinc) and Polished Chrome.



| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| 842-6 | 6" | 24 | 4 Lbs. |
| 842-8 | 8" | 24 | 6 Lbs. |
| 842-10 | 10" | 24 | 8 Lbs. |
| 842-12 | 12" | 24 | 10 Lbs. |
| 842-14 | 14" | 24 | 14 Lbs. |
| 842-16 | 16" | 24 | 16 Lbs. |
| 842-18 | 18" | 12 | 20 Lbs. |

No. 844 Shelf Bracket

Application:

Perimeter and loose fixtures with glass or wood shelving.

See page 3.5 for shelf rest clips.


Features:

1/8" thick tempered steel. Slim profile.

Uphook at standard for added stability and safety.

Stock Finish:





| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|-----------|
| 844-6 | 6" | 12 | 4 Lbs. |
| 844-8 | 8" | 24 | 6 Lbs. |
| 844-10 | 10" | 24 | 8 Lbs. |
| 844-12 | 12" | 24 | 10 ½ Lbs. |
| 844-14 | 14" | 24 | 15 Lbs. |
| 844-16 | 16"]2" | 24 | 16 Lbs. |

No. 843 Shelf Bracket (Adjustable Downslant)

Application:


Perimeter and loose fixtures with glass or wood shelving.

Features:

Tempered steel. Bracket is made of .080" thick medium

Stock Finish:

Brillatone (Satin Zinc).

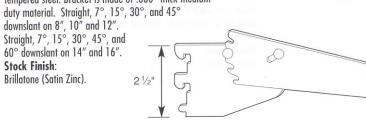

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| 843-8 | 8" | 12 | 3 ½ Lbs. |
| 843-10 | 10" | 12 | 4 ½ Lbs. |
| 843-12 | 12" | 12 | 5 Lbs. |
| 843-14 | 14" | 12 | 7 Lbs. |
| 843-16 | 16" | 12 | 7 ¾ Lbs. |



No. 867 Shelf Bracket


Application:

Perimeter and loose fixtures with glass or wood shelving. See page 3.5 for shelf rest clips.

Features:

Wider gusset for stronger weight capacity. 1/8" thick tempered steel.

Stock Finish: Brillatone (Satin Zinc) and Polished Chrome.

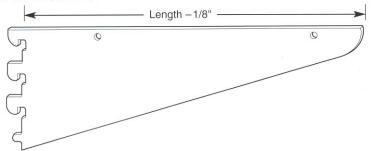

| | | 2// Kis |
|--------|----------------------------|--|
| Length | Packed/Ctn. | Wt./Ctn. |
| 8" | 24 | 8 Lbs. |
| 10" | 24 | 10 Lbs. |
| 12" | 24 | 12 Lbs. |
| 14" | 24 | 14 ½ Lbs. |
| 16" | 12 | 17 ¼ Lbs. |
| 18" | 12 | 20 Lbs. |
| 20" | 12 | 22 Lbs. |
| 22" | 12 | 24 ¼ Lbs. |
| 24" | 12 | 27 Lbs. |
| | 8" 10" 12" 14" 16" 18" 20" | 8" 24 10" 24 12" 24 14" 24 16" 12 18" 12 20" 12 22" 12 |

^{*}Can be made to order with locknut thumb screw to reduce sway.

No. 871 Shelf Bracket


Application:

Perimeters, loose fixtures, and hangrod.

See page 3.5 for shelf rest clips.

Features:

%" thick tempered steel. Uphook for added stability and safety. Stock Finish: Brillatone (Satin Zinc) and Polished Chrome.

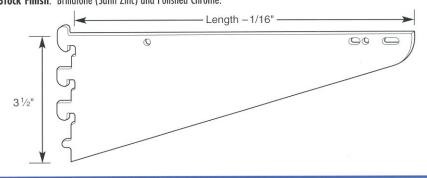

| Part Number | Length | Packed/Ctn. | Wt. |
|-------------|--------|-------------|-------------|
| 871-12 | 12" | 24 | 14 ½ Lbs. |
| 871-14 | 14" | 24 | 14 ½ Lbs. |
| 871-16 | 16" | 12 | 17 1/4 Lbs. |

^{*}Can be made to order with locknut thumb screw to reduce sway.

No. 824 Cornice Bracket

Part Number Adj. Length Packed/Ctn. Wt./Ctn. 824 24"-36" 2 7 ½ Lbs.

* Can be made to exact length required. Can be made to order with locknut thumb screw to reduce sway.

Application:

Use with concealed or surface mounted standards for most cornice or facia installations.


Features:

Bracket with uphook for added stability and safety. $1'' \times 1 \frac{1}{2}'' \times 24''$ long tube. Adjustable insert allows additional 12'' extension. $\frac{1}{2}$ '' thick tempered steel stub bracket.


Stock Finish:

Brillatone (Satin Zinc).

No. 881 Bracket







No. V848 Faceout

Application:

For merchandising on perimeters and loose fixtures.

Features:

Plastic end stop. ½" x 1½" tube. %" thick tempered steel stub bracket.


Stock Finish:

Value Line Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| V848-12 | 12" | 12 | 15 lbs |

*Can be made to exact length required.

No. A848 Adjustable Gusset Faceout



Application:

For merchandising on perimeters, loose fixtures, and back islands.

Features:

Welded, ground, and polished end cap. Tab or flush end cap available. Adjustable $\frac{1}{2}$ thick stub bracket allows for flush installation.


Stock Finish:

Made-to-order.

| Part Number | Length |
|-------------|---------------|
| A848-X | Made-to-order |

*Can be made to exact length required.

No. 848 Faceout



Application:

For faceout merchandising on perimeters and loose fixtures.

Features:

Welded, ground, and polished end stop. 1/2" x 1 1/4" tube. 1/4" thick tempered steel stub bracket.


Stock Finish:

Polished Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| 848-6 | 6" | 12 | 9 Lbs. |
| 848-12 | 12" | 12 | 13 Lbs. |

*Can be made to exact length required. Can be made to order with locknut thumb screw to reduce sway.

No. 847 Waterfall Faceout



Application:

For merchandising on perimeters and loose fixtures.

Features:

 30° downslant. Welded, ground, and polished end cap. $\frac{1}{2}$ x $1\frac{1}{2}$ tube. $\frac{1}{2}$ thick tempered steel stub bracket.

Stock Finish:

Polished Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|---------------|-------------|----------|
| 847-12-B | 12" (5 Balls) | 12 | 15 Lbs. |
| 847-16-B | 16" (6 Balls) | 12 | 17 Lbs. |

*Can be made to order with locknut thumb screw to reduce sway. Can be made with cube stops also.



No. 743-L Shelf Rest (Left)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| 743-L | 144 | 4 Lbs. |



Application:

Use with shelf brackets with mounting holes. Designed for flush fit with bracket and shelf.

Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. 743-C Shelf Rest (Center)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| 743-C | 144 | 6 Lbs. |



Application:

Use with shelf brackets with mounting holes.
Designed for center brackets and at ends with shelf overhang.

Features:


Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. 743-R Shelf Rest (Right)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| 743-R | 144 | 4 Lbs. |



Application:

Use with shelf brackets with mounting holes. Designed for flush fit with bracket and shelf.

Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. 743-P-L Shelf Rest (Left)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| 743-P-L | 144 | 2 Lbs. |



Application:

Made of clear lexan plastic for use with special finish brackets to maintain a clean profile.

Features:

Swivel-lock. Clear suction cushions are included to secure glass shelves.

No. 743-P-C Shelf Rest (Center)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| 743-P-C | 144 | 3 Lbs. |



Application:


Made of clear lexan plastic for use with special finish brackets to maintain a clean profile. Designed for center brackets and at ends with shelf overhang.

Features:

Swivel lock. Clear suction cushions are included to secure glass shelves.

No. 743-P-R Shelf Rest (Right)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| 743-P-R | 144 | 2 Lbs. |



Application:


Made of clear lexan plastic for use with special finish brackets to maintain a clean profile.

Features:

Swivel lock. Clear suction cushions are included to secure glass shelves.

No. W-743-L Shelf Rest (Left)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| W-743-L | 144 | 5 Lbs. |



Application:

Double width for added safety. Designed for flush fit with bracket and shelf.

Features:


Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. W-743-C Shelf Rest (Center)

| Part Number | Packed/Ctn. | Wt./Ctn. |
|-------------|-------------|----------|
| W-743-C | 144 | 6 Lbs. |



Application:

Double width for added safety. Designed for center brackets and at ends with shelf overhang.

Features:


Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. W-743-R Shelf Rest (Right)

| Part Number | Packed/Ctn. | Wt./Ctn. | |
|-------------|-------------|----------|--|
| W-743-R | 144 | 5 Lbs. | |



Application:

Double width for added safety. Designed for flush fit with bracket and shelf.

Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:


Brillatone (Zinc).

Some items can be made-to-order in a wide variety of plated or powder coated finishes.



Hangrod Brackets

No. V825-2 Hangrod Bracket



Application:

Fits 800 Line. Designed for use with No. 225 hangrod and faceouts.

Features:

 $\% 6^{\prime\prime}$ thick saddle. Uphook for added strength and stability.


Stock Finish:

Value Line Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| V825-2 | 2" | 12 | 7 Lbs. |

^{*}Can be made with locknut thumb screw to reduce sway.

No. 825-4 Hangrod Bracket



Application:

For use with No. 225 Hangrod. Fits 800 Series standards.

Features

Uphook for added stability and safety.

3/16" thick saddle. Left hand and right hand available.


Stock Finish:

Polished Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|------------|
| 825-L/C/R-4 | 4" | 12 | 7 1/4 Lbs. |

^{*}Can be made with locknut thumb screw to reduce sway. Can be made to exact length required.

No. V865-12 Hangrod Bracket



Features:

 $\frac{3}{16}$ " thick saddle. $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " tube.


Stock Finish:

Value Line Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|-------------|--------|-------------|----------|
| V865-12 | 12" | 12 | 13 Lbs. |

^{*}Can be made with locknut thumb screw to reduce sway. Can be made to exact length required.

No. 825 Hangrod Bracket



Application:

For use with No. 225 Hangrod and 800 Series Standards.

Features:

Uphook for added strength and stability. $\frac{3}{6}$ " thick saddle. Left hand and right hand available.

Stock Finish:

Polished Chrome.

| Part Number | Length | Packed/Ctn. | Wt./Ctn. |
|--------------|--------|-------------|----------|
| 825-L/C/R-12 | 12" | 12 | 13 Lbs. |

^{*}Can be made with locknut thumb screw to reduce sway. Can be made to exact length required.

